


This product cleans and removes varnish and carbon build-up in the intake and induction system. It is an excellent "top engine" formulation designed to remove carbon from the combustion chamber, resulting in improved fuel combustion, better engine performance, and better fuel economy. For use in all fuel systems including the new Direct Injection (GDI) system.

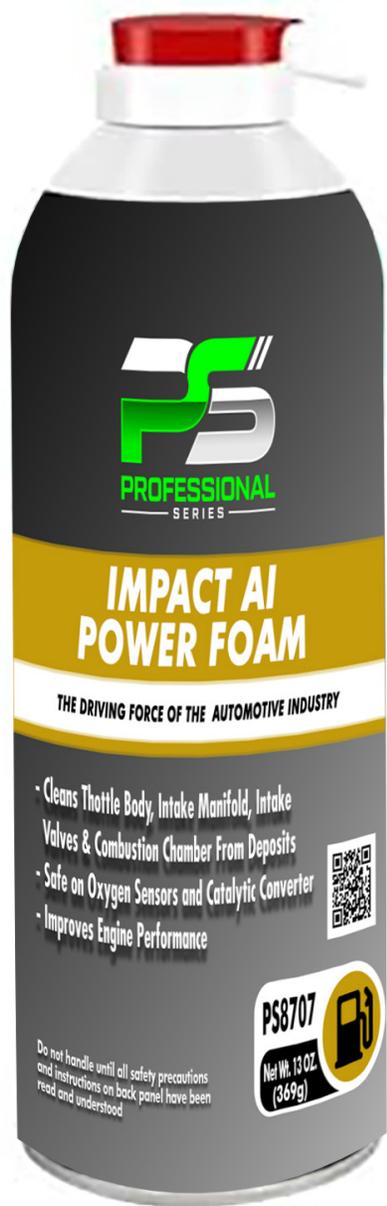

FEATURES AND BENEFITS:

- Cleans Throttle Body, Intake Manifold, Intake Valves & Combustion Chamber From Deposits
- Safe on Oxygen Sensors and Catalytic Converter
- Improves Engine Performance

Directions: With engine OFF remove the throttle boot from the throttle bore. Place applicator tip from the Impact AI Power Foam product and insert into the throttle bore. The tip of the tool should always point to where the throttle plate tips inward when opened. Reinstall the throttle boot before performing service. Start the engine and allow it to reach operating temperature. Use a throttle pedal depressor to stabilize the engine speed at approximately 1,200 RPM's. DO NOT EXCEED 1,500 RPM's. Apply product by depressing valve on top of can. Apply product for 30 seconds. Immediately turn off engine and allow product to soak for 10 minutes. Repeat application until all product is used (typically 4 applications). Upon engine restart bring engine RPM's to 1,200 for 30 seconds and then snap throttle vehicle 3 times to help purge product. NOTE: Separation of the product components may occur during extended storage. Product will perform as specified once shaken as directed. Read entire Safety Data Sheet prior to using.

SPECIFICATIONS:

Product No.: PS8707

Net Weight: 13oz (369g)

Case Quantity: 12 each

