


Professional Series Dot 4 LV Low Viscosity Brake Fluid performs a variety of very important functions in the braking systems; it transmits the required power, minimizes corrosion, lubricates, controls proper seal swelling and operates over a wide temperature range.

Professional Series Dot 4 LV Low Viscosity Brake Fluid features a minimum dry boiling point (ERBP)* of 446 °F, and is an enhanced fluid over the DOT 3 level and may be used wherever DOT 3 or DOT 4 fluids are recommended.

Professional Series Dot 4 LV Low Viscosity Brake Fluid meets or exceeds the requirements of the Federal Motor Vehicle Safety Standard (FMVSS) 116 DOT 4, SAE J1704 and ISO 4925.

Applications: FMVSS 116 Dot 4, SAE J1704 and ISO 4925

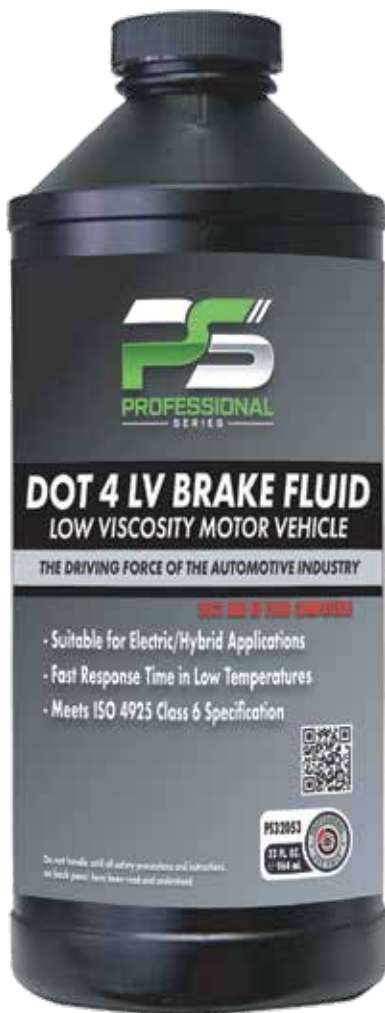

TYPICAL INSPECTION DATA

• API Gravity:	1.05
• Wet Boiling Point (ERBP), C (Min):	169° C
• Dry Boiling Point (ERBP), C (Min):	262° C
• Viscosity cSt:	
@ -40° C Max	549
@ 100 C° Min	1.9
• pH:	8.0
• Color:	Amber

* ERBP = Equilibrium Reflux Boiling Point

SPECIFICATIONS:

Product No.: PS32053
Net Weight: 32oz (964mL)
Case Quantity: 12 each

